



long-lasting  
**plastic**  
No more painting

# HS 125<sup>®</sup>

## Cladding profile for roof overhang and facade

### Application:

The **HS 125 profile** range offers high quality plastic profiles for the cladding of:

- roof overhangs ■ roof borders ■ facades
- dormers ■ walls and ceilings for indoors and outdoors

### System:

- Variety of colours and forms
- Successful in use since more than 40 years
- Full range: profiles, accessories and fastening materials

### Material:

Plastic in window quality made of unplasticized PVC with a 5,5 mm thick PVC-hard-foam base.

**Advantages:** extremely stable · high thermal insulation (U-value 2,19W/m2K) · easy to clean · no rotting · never paint again

### Dimensions:

Cladding width: 125 mm, profile thickness: 5,5 mm, height: 17 mm  
Standard lengths: 3 + 6 m, special lengths available on request




HS 125 profile cross section with predrilled holes; decorative film

HS 125 profile cross section; white



**Cladding profile HS 125**  
125 x 16,5 mm

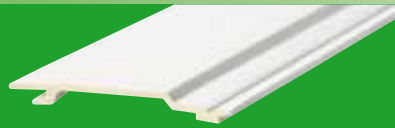

**Hard-foam angle profile**  
**9 mm thickness**

150 x 35; 175 x 35; 200 x 35;  
230 x 35; 250 x 35; 275 x 35;  
300 x 35; 400 x 35 mm



**Hard-foam flat profile**  
**9 mm thickness**

100 mm, 150 mm,  
215 mm, 300 mm




**U-Profile**

25 x 17 x 35 mm



**H-Profile**

68 x 48 mm

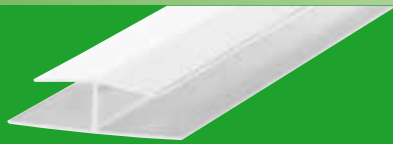


**Corner profile**

39/31 x 39/31 mm



**Corner profile variable**  
**Outer and inner corner**

160 x 120 mm

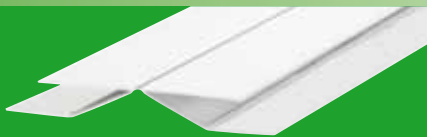

**Before**



**After**



**Connecting piece for HS 125**



**Countersunk screw TORX**

3 x 25 and 3,5 x 40 mm  
(art.no. 21733 and 25639)



**Colour-Nail „Poly-Top-Pin“**

40 mm (art.no. 11580)

**Colour-Nail „Poly-Top-Nail“**

50 mm (art.no. 22987)



**Facade screw V4A stainless steel**

5,5 x 35 mm Torx size,  
Screw head painted, white  
(art.no. 25026)



## The assembly quick, easy, precisely fitting



The easy assembly shows the professionalism of **HS 125 – The Original**. The elaborate construction guarantees an almost jointless connection between the individual profile planks. The high accuracy of fit of the tongue and groove joint in combination with the hidden fixation guarantees the easy and safe profile assembly. Dark-coloured profiles possess additionally predrilled holes in the fastening groove thus compensating the linear expansion of the profile in case of temperature changes. The connecting piece guarantees an optically appealing junction at the ends of the profiles by gluing one side of the connecting piece. Distance between the battens: for use as ceiling cladding: up to 50 cm. For use as facade cladding: max. 30 cm distance between the fixing points. Screw: 3,5 x 40 mm – TORX


## The Colours

Plain colours



White Cream White Light Grey

Decorative films

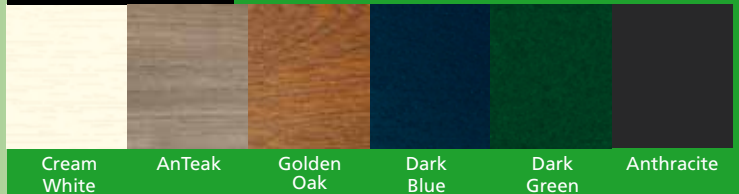

Cream White AnTeak Golden Oak Dark Blue Dark Green Anthracite

special colours and decorative films available on request



**Ferdinand Stückerjürgen GmbH & Co. KG**  
**Kunststoffwerk – plastics processing**

Grüner Weg 4 · 33397 Rietberg-Varensell · GERMANY

Tel.: +49 (0) 5244-404 0 · Fax: +49 (0) 5244-404 244

E-Mail: p710@stueckerjuergen.de

Internet: www.stueckerjuergen.com

Address of the local dealer