



long-lasting
plastic
No more painting

HSW 9[®]

Cladding for roof borders - 9 mm thickness

Application:

The **HSW 9** profile range offers high quality plastic profiles for the cladding of:

- roof overhangs ■ roof borders
- dormers ■ window reveals
- for new building and renovation ■ for indoors and outdoors

System: Hard-foam angle profile and hard-foam flat profile

- Variety of colours and forms
- Successful in use since more than 40 years
- Full range: profiles, accessories and fastening materials

Material:

Plastic in window quality made of unplasticized PVC with a 8 mm thick PVC-hard-foam base.

Advantages: extremely stable · thermal insulation
easy to clean · no rotting · never paint again

Dimensions:

Width: 150 – 400 mm, profile thickness: 9 mm, standard length: 6 m,
special lengths and widths available on request



HSW 9[®]
Das Original
Profil

HSW 9; Hard-foam angle
profile 9 mm; white

**Hard-foam angle profile
9 mm thickness**

150 x 35; 175 x 35; 200 x 35;
230 x 35; 250 x 35; 275 x 35;
300 x 35; 400 x 35 mm



**Hard-foam flat profile
9 mm thickness**

100 mm, 150 mm,
215 mm, 300 mm



**External corner piece
for hard-foam profile**

Length: 90 - 300 mm



**Internal corner profile
for hard-foam profile**

Length: 90 - 300 mm



**Connecting piece
for hard-foam profile**

Length: 90 - 300 mm



**Colour-Nail „Poly-Top-Nail“
50 mm**




**Facade screw V4A stainless steel
5,5 x 45 mm Torx size,
Screw head painted, white**



The assembly – quick, easy, precisely fitting


The full range **HSW 9** offers you a clean and easy assembly. All hard-foam profiles are covered with a surface protection film against damages. The film has to be removed after the assembly. The connecting pieces – connecting piece, external and internal corner piece – guarantee an optically appealing junction at the ends of the profiles by gluing them on one side of the connecting piece. The distance between two fixation points with the V4A facade screws (Torx) should not exceed 30 cm.

We recommend drilling a slightly bigger hole to compensate the linear expansion in case of temperature changes. The profiles can be worked with customary woodworking tools. We recommend a fine-toothed saw blade.

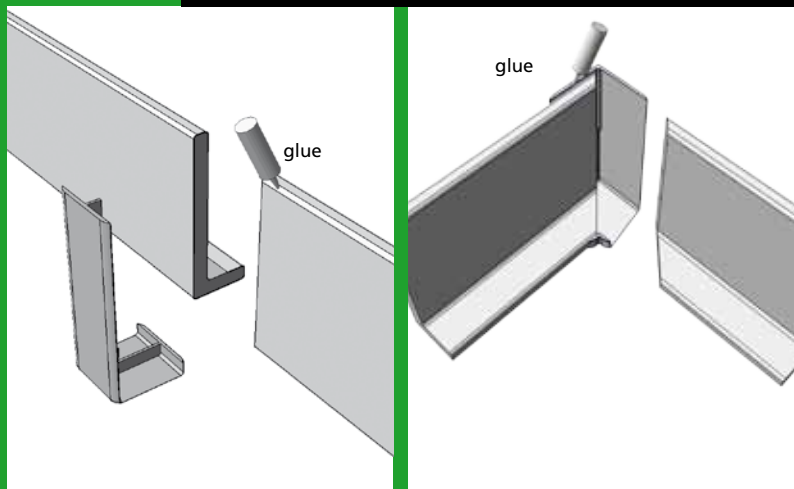


The Colours

Plain colours

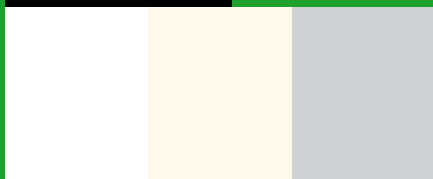

White Cream White Light Grey

Decorative films

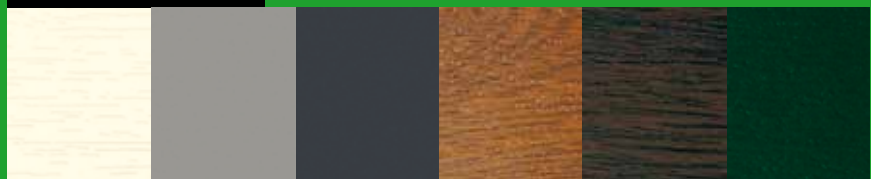

Cream White Silver Grey Anthracite Golden Oak Dark Oak Dark Green

special colours and decorative films available on request



**Ferdinand Stückerjürgen GmbH & Co. KG
Kunststoffwerk – plastics processing**

Grüner Weg 4 · 33397 Rietberg-Varensell · GERMANY

Tel.: +49 (0) 5244-404 0 · Fax: +49 (0) 5244-404 244

E-Mail: p710@stueckerjuergen.de

Internet: www.stueckerjuergen.com

Address of the local dealer