
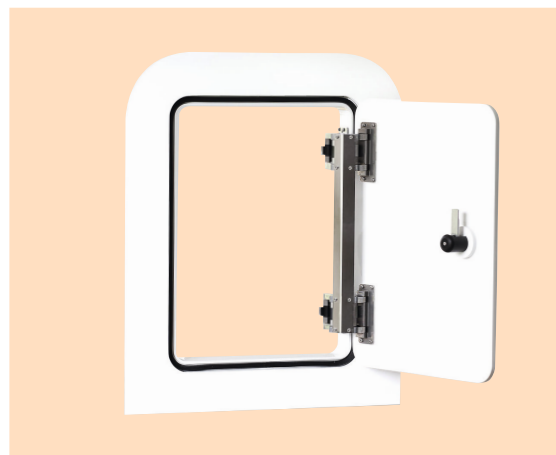


WITHOUT VISIBLE FRAME INTEGRATED FLUSH IN THE BULWARK

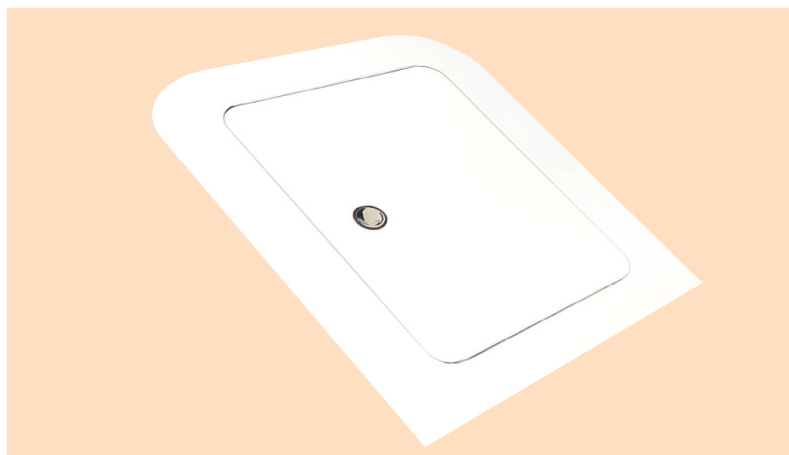

Customer benefits

- High quality material (GRP)
- Free of corrosion
- Lightweight
- V4A stainless steel fittings
- **Space saving, internal patented V4A pantograph hinge**
- Available as a single or double door design
- Surface finishing according to your specification – high gloss
- The outer geometry is produced after detailed on-board measuring
- Straight and curved geometries are realizable
- The profile frame is not visible when closed – caused by the bonding and the sealing in the bulwark
- On-board assembly is performed by a Stükerjürgen assembly team

Technical characteristics

- 175 degree opening angle
- The door can be locked at 90 and 175 degree within the hinge
- Door is equipped with an EPDM seal to the frame



Project realization steps

- On-board measuring
- Engineering - straight or curved
- Manufacturing as a 2-part system (hatch and frame)
- Painting
- Completion in the factory
- On-board assembly

After sales services

- 24 month guarantee - worldwide
- Spare parts on stock in Germany, Spain and USA
- All Bulwark Hatches can be dismantled, painted and reassembled at a fixed price within the refit timeframe